



Model: JM35			
Input Voltage	6 to 180 VDC, PMDC		
Load Capacity Thrust	1250 Pounds (5550 Newton's)		
Travel Speed Inch per Second	0.14 to 0.42 Inch per sec (3.6 to		
(mm per sec)	10.7mm)		
Operating Temperature	40 to 60°C		
Duty Cycle	1 Minute On 5 Minutes Off		
Thermal Protector Rating	Optional, 80°C 100 volts		
Stroke	Customer Defines		
Feedback Potentiometer, Optical,	Optional, Internal mounting		
Reed			

Options:


- Adjustable Cam
- Feedback
- Dust Cover
- Brake

Applications:

- Commercial Treadmills
- Adjustable Work Stations
- Dental Chairs & X-Ray
- Medical beds

Drawing



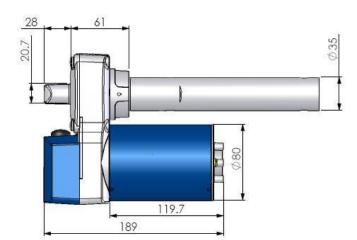

LianDa Industrial Zone, FeiHu North Rd, LuDu Town, Tai Cang City, JiangSu, P.R.C. Postal Code.:215412 Copyrights © 2009 Adacel Technologies , LTD All Rights Reserved. Tel: 86-512-5337-1388 Fax: 86-512-5337-1386 email: info@adaceltech.com

El 😽	E2	W1	W2